



- Black & Clear tempered glass walls
- Phone & FM Radio
- Auxiliary RCA input
- Steam Aromatherapy Cup
- Body Massage Jets
- Rainfall Shower Head
- ✤ Hand-held Shower w/ Height-Adjustable Bracket
- ✤ Adjustable Steam Time & Temperature Settings
- Control Panel with Remote
- Hinged Door
- ✤ 2 Removable Benches
- Circulation Fan
- Chromatherapy lighting
- 3kW Self-Draining Steam Generator
- Stone composite base
- Assembly from inside the unit
- Left/Right Models Available

TECHNICAL INFORMATION

- Materials: Acrylic, Aluminum, Tempered Glass
- Power Supply: 220V
- Steam Ready: 2-5 MIN
- Dimensions: 59 x 32 x 86 IN

ELECTRICAL INFORMATION

- 220 volt, 20 amp GFCI breaker
- 1 dedicated 12-2 line for steam (line 1, line 2, and ground)
- There is a length of wire from the control box supplied to connect to power source.

PLUMBING REQUIREMENTS

- The unit is equipped with hot and cold, metal braided ½ inch water supply hose with ½ national pipe thread.
- Need to install hot and cold shutoffs with ½ -male national pipe thread (not included).
- Supply hoses are to connect from the faucet manifold on the unit to the shutoff valves.
- All water jet features are pre plumbed with reinforced braided flexible supply hose
- All fixtures and fittings must be checked for tightness as they may have been loosened during transport. It is advised to have base onsite before preparing drain location. Access panel advised.
- Please contact Steam Planet for special instructions regarding connection of the steam generator drain and steam cup drain to the main drain.


GENERAL INFORMATION


- Units come broken down in panels and are assembled with screws, nuts and bolts on site. This unit assembles from the inside for convenience.
- <u>Note</u>: All shower bases are a man made stone composite and may need to be set in mortar for leveling purposes.
- It is advised to have base onsite before preparing drain location
- Access panel area recommended
- Manufacturer reserves the right to change specs or features at anytime. Please check to confirm details. 1-866-783-2661

<u>M-6027-R</u>





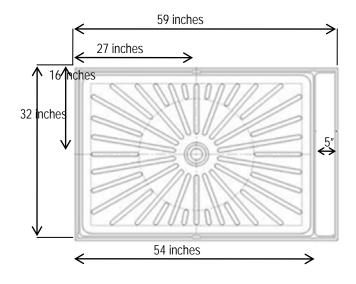



<u>M-6027-L</u>